

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000749

International filing date: 28 February 2005 (28.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0404464.0  
Filing date: 28 February 2004 (28.02.2004)

Date of receipt at the International Bureau: 18 April 2005 (18.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

6 April 2005

20



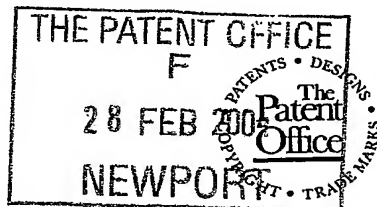

01MAR04 E877043-1 000790  
P01/7700 0.00-0404464.0 CHEQUE

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	PA5047				
2. Patent application number (The Patent Office will fill this part in)	0404464.0		28 FEB 2004		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	<table border="0"> <tr> <td>Paul Tee Hui LEE Apartment 33, Block A Anstey Grange 69 Bradgate Street LEICESTER LE4 0AW United Kingdom 08262826002</td> <td>Marc Tee Huang LEE Apartment 12-01, Block B Elizabeth Towers 12 Mount Elizabeth SINGAPORE 228511 Republic of Singapore 8819468001</td> </tr> </table>			Paul Tee Hui LEE Apartment 33, Block A Anstey Grange 69 Bradgate Street LEICESTER LE4 0AW United Kingdom 08262826002	Marc Tee Huang LEE Apartment 12-01, Block B Elizabeth Towers 12 Mount Elizabeth SINGAPORE 228511 Republic of Singapore 8819468001
Paul Tee Hui LEE Apartment 33, Block A Anstey Grange 69 Bradgate Street LEICESTER LE4 0AW United Kingdom 08262826002	Marc Tee Huang LEE Apartment 12-01, Block B Elizabeth Towers 12 Mount Elizabeth SINGAPORE 228511 Republic of Singapore 8819468001				
Patents ADP number (if you know it)					
If the applicant is a corporate body, give the country/state of its incorporation					
4. Title of the invention	IMPROVED LUGGAGE				
5. Name of your agent (if you have one)	Marks & Clerk				
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	45 Grosvenor Road ST ALBANS Hertfordshire AL1 3AW				
Patents ADP number (if you know it)	1511001 /				
6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number (if you know it)	Date of filing (day / month / year)		
7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier UK application	Date of filing (day / month / year)			
8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?	NO				
Answer YES if:					
a) any applicant named in part 3 is not an inventor, or					
b) there is an inventor who is not named as an applicant, or					
c) any named applicant is a corporate body.					
Otherwise answer NO (See note d)					

# Patents Form 1/77

Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form	-
Description	17
Claim(s)	2
Abstract	1
Drawing(s)	20 + 20

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for a preliminary examination and search (Patents Form 9/77)	1
Request for a substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

*Ian Harold Coates*

Date 27 February 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Ian Harold COATES  
01727 854215

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

# IMPROVED LUGGAGE

## Field of the Invention

5 This invention relates to traveller's luggage cases and more particularly to luggage cases which are equipped with wheels and a push-handle to facilitate movement of the case along a floor, walkway or the like.

## Background of the invention

10 During the past few decades, people have been travelling over longer distances for longer periods, carrying with them larger and heavier suitcases. Lifting and manually carrying luggage at airports, railway stations, hotels or other sites is a task which is generally disliked by travellers.

15 Rental luggage carts are available at certain sites of this kind but the renting process is itself an inconvenience and such carts do not remain with the traveller after leaving the site of rental.

20 In order to mitigate this problem, wheeled luggage carriers which typically have a lightweight and foldable construction to facilitate handling and storage of the device when it is not in use, have been used. An example of such a carrier is shown in Figure 1.

25 Such carriers are essentially small hand trucks of the type which have a platform on which the luggage case is rested, a pair of wheels which extend below one edge region of the platform and a handle which extends upward from the edge region. The user grasps and tilts the handle to lift the platform and luggage case upward from the underlying floor or the like and the carrier may then be pulled or pushed to the destination of the case. Such carriers are helpful but are not entirely free of  
30 inconveniences of their own.

The carrier is not self-stabilized and it is not entirely self-supporting during movement. A person who is pulling or pushing such a carrier must continually exert additional effort in order to hold the carrier at the tilted orientation that enables it to  
35 be travelled along the floor or other surface. In the absence of such effort by the

user, gravity pivots the carrier until either the platform or the handle itself contacts the floor.

When the luggage case is removed from the carrier the carrier itself becomes essentially still another separate piece of luggage which the traveller must contend with.

The instability of such a carrier when it is tilted to the travelling orientation and the pivoting movement which occurs when the handle is released make it unsatisfactory for certain purposes such as for transporting a small child along with a luggage case.

Efforts have been made to make the luggage case itself wheelable without the aid of a separate carrier. This typically consists of providing wheels at the surface of the case that faces downward when the case is in an upright position.

Most case designs have wheels placed at the opposing corners of a narrow side of a conventional rectangular box-type suitcase. When in this orientation, in which the case can be wheeled along, the case is substantially higher than it is wide. An example of this type of case can be seen in Figure 2.

The advantages of this arrangement are ease of changing between carrying and rolling the suitcase and rolling the suitcase by one's side without obstruction to walking. However the significant disadvantages are difficulty in manoeuvrability due to a long narrow base, instability due to the narrow base and a high centre of gravity and the person pulling such a case generally has to lean over into an awkward posture.

After wheels are attached to suitcases making them 'more portable', further innovations were aimed at optimising ergonomics, case material and case design for wheeling and manoeuvrability efficiency.

Retractable handles were built into wheeled luggage cases to facilitate movement of the case as shown in Figure 3. When the handle is extended, the unit may be tilted about the wheels and be operated in essentially the same manner as the previously discussed luggage case carriers.

The advantages of such a design are a retractable handle, better manoeuvrability and improved ergonomics. However, such a design is meant for small and light cases. Large size suitcases that have adopted such a design have been  
5 cumbersome and tiresome to take around due to their considerable size and weight and are subject to all of the limitations of the prior carriers.

In all of the previous designs the narrow base and high centre of gravity meant that the cases were unstable.

10

Back in the 1980's, some tried to attach wheels to the broad side of the suitcase where the surface was widest and push (or pull) the case lying on this widest side on the wheels like a trolley (see prior U.S. Patent No. 6,041,900 Outerrigger Inc.). This provided better stability with a wide base and low centre of gravity. However,  
15 this idea had never taken-off as there are several disadvantages inherent in the design. For example, there are practical inconveniences with potential damage to the exposed wheels during transfer/storage and in packing and unpacking with a non-stationary suitcase.

20 People have tried to make the wheels retractable and generally use a holding mechanism, for example a catch or latch, in order to hold the wheel in its extended position during use. An example of this is shown in US 5407039 Alper, Brad and Trevethick, Richard. The multiple retractable wheels are flimsy, cumbersome and inconvenient to activate and retract. Moreover, they make the whole case too heavy  
25 for practical purposes.

In addition, the holding mechanisms are not always able to support the weight of the often heavy luggage for prolonged use which results in failure of the holding mechanism and luggage of this type will often have to be repaired or replaced on a  
30 regular basis.

There has been a long felt want for luggage which is (1) easily manoeuvrable with good stability and ergonomics and (2) convenient and practical for use. The present invention is directed to overcoming one or more of the problems discussed above.  
35



### Summary of the invention

According to a first aspect of the present invention there is provided a wheeled luggage case having a luggage receptacle, the receptacle having a bottom wall, a  
 5 top wall, opposed end walls and opposed side walls forming a luggage compartment, wherein said luggage case further comprises:-

- (i) a plurality of support wheels located at one end of the bottom wall;
- (ii) a retractable steering wheel assembly or assemblies, located on the bottom  
 10 wall, distanced from the support wheels, said steering wheel assembly being moveable between an active position in which the wheel assembly extends below the bottom wall of the luggage receptacle and an inactive position in which the wheel assembly is substantially within the profile of the luggage receptacle;
- (iii) a handle means located at the same end of the luggage receptacle as the  
 15 support wheels;

wherein when the steering wheel assembly is in an active position it extends from the base wall.

Preferably the steering wheel assembly, in the active position, extends further from  
 20 the base wall than the support wheels. This arrangement whereby the luggage receptacle is tilted back towards the support wheels displaces the centre of gravity towards the user pushing the case and makes it easier to push. This arrangement also displaces the centre of gravity away from the steering wheels, thus off-loading it and making it easier to steer.

25 Preferably the wheeled luggage comprises two support wheels and one retractable steering wheel assembly in a tricycle wheel configuration. This tricycle configuration confers additional manoeuvrability with good stability while minimising total luggage weight and optimising ease and convenience of operating the wheeling system.

30 This arrangement optimises manoeuvrability with good stability while minimising total luggage weight and optimising ease and convenience of operating the wheeling system.

35 The support wheels are only 'activated' when steering wheel(s) is extended and tilts the case backwards. This arrangement optimises the ease and convenience of

activating and inactivating the wheeling system and minimising the weight of wheeling system.

- 5 Preferably the retractable wheel assembly is pivotally mounted or mounted in a slotted fashion.

Preferably the luggage receptacle incorporates recesses in both the end wall and the bottom wall adapted to accommodate the steering wheel assembly in the inactive and active positions respectively.

10

Preferably the wheel of the steering wheel assembly is pivotally mounted in the assembly such that it can rotate about its own axis and about an axis substantially perpendicular to it. This arrangement facilitates steering.

- 15 Preferably the steering wheel assembly, when in an active position, is supported by a support surface on the base wall of the case.

Preferably the support surface is recessed into the base wall of the case.

- 20 In a particularly preferred embodiment the support surface for the wheel assembly in the base wall is located at an acute angle to the base wall of the case with respect to a line between the front of the case and the support wheels so that the support surface is about parallel to the ground surface. This arrangement has the advantage that the forces acting on the steering wheel assembly are dissipated through the support surface to the base of the case in compression rather than through point loading at the pivot means about which the steering wheel assembly is mounted.

- 30 In a further preferred embodiment the steering wheel assembly and support wheels are so sized and shaped such that, with the steering wheel assembly in its active position, the base wall forms an acute angle with respect to the surface the case is standing on, the acute angle extending away from the support wheels. This arrangement displaces the centre of gravity of the case contents toward the support wheels and towards the handle and the user. This makes the case easier to push the load . At the same time, this arrangement displaces the centre of gravity of the
- 35

case contents away from the steering wheel to offload it and makes it easier to steer the case.

5 Preferably, when the steering wheel is retracted in an inactive position, the broad base of the case is parallel to the supporting ground on a 'stopper' at one end of the case base and on support wheels on the other end. When the front steering wheel is extended in the active position, it tilts the case and automatically 'activates' the rear support wheels into play.

10 This arrangement whereby the luggage receptacle is tilted back towards the support wheels displaces the centre of gravity towards the user pushing the case and makes it easier to push.

15 This arrangement whereby the luggage receptacle is tilted back towards the support wheels displaces the centre of gravity away from the steering wheel(s) and makes it easier to steer.

20 This arrangement whereby the luggage receptacle is tilted backwards enables the retractable handle to tilt backwards away from the posterior surface of the luggage receptacle to allow for striding space.

This arrangement whereby the luggage receptacle is tilted backwards renders other luggage carried on top of the case less likely to fall off.

25 This arrangement whereby the luggage receptacle is tilted backwards enables the case to be converted to a push pram with safety and accessorial attachment.

30 Preferably the handle means can be moved between an active position at which the handle extends outwards from the luggage receptacle and can be engaged by the user at an inactive position at which the handle is contained substantially within the luggage receptacle. When the steering wheel and handle are retracted, the luggage case can be carried by a handle placed at the long narrow surface like an ordinary carrying case.

35 Preferably, when the wheeling system is activated and the case tilted backwards, the handle is also tilted backwards away from the posterior case surface to allow for

sufficient striding space. Preferably, the posterior surface of the case is optionally recessed to provide additional striding space.

5 Preferably, the case is made of robust material not only for durability and protection of the contents, but to be able to provide a platform for carrying other pieces of luggage stacked on top of it. When the steering wheel and handle are in their active positions, the case can act as a cart/trolley for carrying other pieces of luggage.

10 Preferably, the case can be conveniently converted into a push pram for babies or toddlers with suitable assessorial and safety attachment.

Preferably, a simple braking system is installed for safety and convenience purposes.

15

#### **Brief description of the drawings**

The present invention will now be described by way of examples only with reference to the accompanying drawings wherein:

- 20 Figure 1 illustrates a prior art wheeled luggage carrier;  
 Figure 2 illustrates a prior art wheeled luggage case;  
 Figure 3 a illustrates a prior art wheeled luggage case with handle;  
 Figure 3b illustrates a close up view of prior art retractable wheel;  
 Figure 4 illustrates a side view of a luggage case according to one embodiment of  
 25 the present invention where the steering wheel and handle are in an active position;  
 Figure 4a illustrates a close up view of the steering wheel assembly;  
 Figure 5 illustrates a side view of the luggage case of Figure 4 where the steering wheel assembly is moving towards an inactive position;  
 Figure 6 shows a side view of the luggage case of Figure 4 in between an active  
 30 and inactive position;  
 Figure 7 shows a side view of the luggage case of Figure 4 in an inactive position;  
 Figures 8, 9 and 10 show various perspective views of a luggage case according to the first embodiment of the present invention; and  
 Figure 11 illustrates an alternative embodiment of the invention.  
 35 Figures 12 to 24 illustrate further alternative embodiments of the invention.

### Description of the preferred embodiments

The present embodiments represent currently the best ways known to the applicant of putting the invention into practice. But they are not the only ways in which this  
5 can be achieved. They are illustrated, and they will now be described, by way of example only.

Figures 1-3 show various prior art designs for mounting a luggage case on wheels. Figure 1 shows a foldable frame upon which luggage would be placed to facilitate  
10 movement. Figure 2 shows a case with wheels mounted at one end of a narrow edge surface. Figure 3a shows an alternate wheel mounted case with a retractable handle to facilitate movement. All of these designs suffer from the various drawbacks above.

15 Few cases incorporate means for making the wheels retractable. There are obvious advantages to this, when not being wheeled the wheels can catch and snag on various articles. Also it is desirable to have a stationary receptacle when packing and unpacking.

20 An example of a typical retraction means is shown in figure 3b.

A wheel 20 is partially situated in an alcove 21 formed in the frame of the receptacle 22. The axle 23 of the wheel 20 engages a fork 24 having a shank 25 that extends  
25 up into a vertical passage 26 in a thickened portion of the frame 27. The shank and passage are of sufficient length to enable the raising of the wheel to the point where the lower edge of the wheel is above the level of the underside of the receptacle. To hold the wheel at either the raised or the lowered position, the retraction means includes a pin 28 which extends through a passage in the frame and which may be  
30 entered into either of a pair of bores 29 which corresponds with either the raised or lowered position. A compression spring acts against a flange to resist withdrawal of the pin.

The multiple retractable wheels along with the holding mechanisms are flimsy, cumbersome and inconvenient to activate and retract. More pertinently, they make  
35 the whole case too heavy for practical purposes.

Luggage cases often contain heavy loads and will be in use for long periods of time which puts large stresses onto the means holding the wheel in place. In the example in figure 3b all of the forces acting though the shank rests on the pin 28 holding the wheel in the lowered position. This generally results in failure of the holding mechanism after often unacceptably short periods of use.

Figures 4-10 shows a wheeled luggage case 30 according to one embodiment of the present invention. Figure 4 shows a side view of a luggage case comprising a luggage receptacle 31, support wheel assemblies 32a (32b is not shown), a steering wheel assembly 33 and a retractable handle 39.

The luggage receptacle 31 is defined by a base 34, a front end wall 35, a rear end wall 36, a side wall 37 (the other side wall not shown) which forms a luggage compartment. The lid 38 spans the top of the compartment when the case is closed. Receptacle 31 and lid 38 may jointly have the general configuration and construction of a typical traveller's suitcase except for the specialised structural features which will be hereinafter described.

In this particular example, the receptacle 31 and lid 38 jointly have a generally rectangular configuration. Both such components are formed of a durable material. The case 30 may, of course, have other shapes and be formed of other materials and is equally adaptable to any sized luggage case.

It is preferred, although not essential in all cases, that the luggage receptacle 31 and lid 38 jointly have a length and a width which both exceed their height as this provides for maximum stability.

The lid can be fastened to the luggage receptacle by various means known to those skilled in the art and there are various ways in which the lid can be held closed including but not limited to zips, locks, clasps or any holding means.

While the case 30 is designed to be wheeled along a floor, walkway or the like, it is preferably provided with a conventional hand grip (not shown) to enable carrying of the case when it is being moved for only a short distance. The invention is equally adaptable to luggage cases which have other forms of hinges, closures, latching means and provisions for carrying the case.

A generally U-shaped retractable handle 39 enables the traveller to push the case 30 while walking in a normal upright posture. The handle has a pair of coplanar parallel arms 40 which can be retracted into a chamber 41 so that the top of the handle does not protrude beyond the lid 38 when not in use and does not interfere with storage of the case in restricted spaces. The opposite ends of the arms are linked by a cross member 42 which is grasped by the user during travel of the case. The handle 34 is extendible and contractible as each arm is formed by telescoping members. Means are provided to lock the arms in position during use which can optionally allow the traveller to select the degree of extension.

It should be understood that there are various ways in which the handle can be positioned during use and subsequently stored away when the case is not being used. For example, the handle could be formed from a generally U-shaped pivoting or folding handle. With contemporary light weight and tough materials the handle can easily be manufactured to various designs and the present invention encompasses any handle design.

Spaced apart support wheel assemblies 32a and 32b (not shown) are disposed at opposite side regions of the luggage receptacle 31 in proximity to the back end wall 36 of receptacle 31 and extend downward to contact the supporting surface. This can be seen more clearly in figure 8.

The inclination of the base of the case from the supporting surface tilts the handle bar backwards away from the posterior surface and postero-inferior edge of the case to provide striding space. A portion of the posterior surface of the case is optionally recessed to provide additional striding space (see drawing).

A steering wheel assembly 33 is shown in figure 4 and a close up view of the steering wheel is shown in fig 4a. The axle 43 of the wheel 44 is connected to a holding bracket 45, which in turn is connected to a turning element 45a which can pivot about a substantially vertical axis in order to self adjust to turns in the path of the travel case. The turning element is connected to a pivotally mounted section 46 which allows the steering wheel to be moved between an active position in which the steering wheel assembly 33 extends below the bottom wall of the luggage

receptacle 34 and an inactive position in which the steering wheel assembly is substantially contained within the luggage receptacle and does not protrude significantly beyond the front wall 35 and does not interfere with storage of the case in restricted spaces.

5

The luggage receptacle has a recess or opening 47 which is of sufficient size to receive the steering wheel assembly 33. In the example shown the wheel and turning element are in line during storage but any orientation could be used. The pivot 48 allows the pivotally mounting section to rotate between the active and  
 10 inactive position. In the active position the top 49 of the pivotally mounting section 46 engages with a portion 50 of the support surface attached to the base 34 of the luggage receptacle 31. In this example the portion 50 is recessed slightly. Because the entire top of the pivotally mounting section engages with the support surface at the base of the luggage receptacle forces acting on the steering wheel assembly will  
 15 pass through the turning element and pivotally mounting section and dissipate into the support surface and the luggage receptacle itself. This greatly reduces the stress on any one section of the steering wheel assembly and as such greatly increases its durability and strength.

20 One of the key features of the arrangement shown in Figure 4a is the angle of the portion 50 with respect to the base of the case. Portion 50 is angled by some  $15^\circ$  in a line from the pivot point away from the base of the case and into the body of the case. A consequence of this design is that during forward motion of the case the load on the steering wheel assembly is taken mostly on the surface of portion 50  
 25 which is in contact with the steering wheel assembly, rather than being transmitted entirely through the pivot point, which is the case in earlier retractable wheel assembly designs.

The angle of portion 50 with respect to the base of the case is not critical. Any  
 30 angle, for example  $45^\circ$ , could be used. Generally an angle of  $15^\circ \pm 10^\circ$  is preferred.

Surface 50 is orientated in a way, parallel or slight incline, to the surface on which the case is placed such that the forces acting on the activated steering wheel assembly is compressive and not bending, conferring extra strength to the assembly  
 35 or the use of less material bulk (and weight) on the assembly to satisfactorily withstand practical loading stress. Figure 4 shows that the steering wheel



assembly 33 protrudes further from the base of the luggage receptacle than the support wheel assembly therefore when the steering wheel assembly is in an active position the luggage receptacle sits at an angle, the front end being higher than the back end which has a number of advantages. The angle means that a greater  
5 portion of the forces acting on the luggage receptacle will act through the support wheels, this has the effect that the luggage receptacle will appear lighter and will be easier to manoeuvre and steer through a fulcrum like effect. Secondly the angle means that if any articles are placed on top of the luggage receptacle they will naturally fall towards the handle which will mean that they will stay on top of the  
10 luggage receptacle more easily.

Figure 5 shows the luggage receptacle wherein the steering wheel assembly 33 is in a partially inactive position.

15 Figure 6 shows the luggage receptacle wherein the steering wheel assembly 33 is in an almost fully inactive position. The turning section 45 has been rotated perpendicularly to the direction of forward linear motion to facilitate complete retraction into the opening 47. The retractable handle 39 is in a semi-retracted or inactive position.

20

Figure 7 shows the steering wheel assembly 33 and the handle 39 in an inactive position. Neither substantially protrude beyond the surface of the luggage receptacle.

25 Figures 8-10 show an elevation view of figures 5-7.

Figure 11 shown an alternative embodiment of the invention which includes a stopper 49 attached to the underside of the base 34 of the luggage receptacle. The stopper could comprise a single, centred, stopper but more preferably a plurality (eg  
30 2 or more) positioned so as to support the luggage receptacle in the inactive position. This means that when the steering wheel assembly 33 is in the inactive position the luggage receptacle will rest on the stopper 49 and not the base 34. The stopper 49 is of a size to protrude substantially the same amount from the base as the support wheels which means that the luggage receptacle will be largely level  
35 when the steering wheel assembly 33 is in the inactive position. When the steering

wheel assembly 33 is in the active position the stopper 49 will not interfere with the movement of the luggage case 30.

5 The self-supporting and self stabilizing characteristics of the wheeled luggage case make it suitable for transporting an infant in addition to the contents of the case. For this purpose, a child seat may be disposed on top of lid and be secured to the case. Alternatively other luggage or items may be placed on top of the case.

10 It should be appreciated that the invention could equally be used with a plurality of steering wheels, eg 1 or more.

Preferably, a simple braking system, known to those skilled in the art, is installed for safety and convenience purposes.

15 Figures 12 to 24 show alternative embodiments and further modifications to the invention including a quick release latch for activating the steering wheel and a ring handle guide for retracting the steering back into the slot recess of the case.

20 Also, a ball catch lock of the steering wheel L-frame on to the support surface at the base of the case can be used to prevent detachment during wheel lift-off and an L-shaped steering wheel frame to decrease likelihood of collapse of the steering wheel system, especially during lift-off and when engaging resistance during reversing.

25 In summary the present invention provides a new design for the large size travel suitcase that is easily portable with minimal effort and is highly manoeuvrable, stable and convenient to use.

The proposed suitcase is a light-weight, robust, trolley-type design with a retractable push handle and retractable wheels (see Figures 4 to 7 inclusive).

30

The system described herein has a number of advantages over the prior art. These include:

35 Firstly, the design with a wide base and a low centre of gravity is inherently more stable compared to various traditional suitcase designs. Unlike cases towed on

wheels at an incline (eg US Patent No 5,116,289), this design is self-stabilised and self-supporting during movement.

Secondly, the design is more manoeuvrable. A tricycle wheel configuration, with  
5 two unidirectional rear wheels located one at each side and a single multidirectional front wheel, will confer maximum manoeuvrability (see Figure 8).

Thirdly, a retractable push handle will enable the suitcase to be carried in an upright manner like a conventional case, when the handle and wheels are retracted. With  
10 contemporary light-weight and tough aluminium alloys, the retractable handle can be easily manufactured to various design options.

Fourthly, the retractable wheels allows the wheels to come into play only when needed and avoid potential damage of exposed wheels during luggage transfer.  
15 Prior US Patent No 5,407,039 has multiple retractable wheels that are cumbersome and heavy. We proposed two small light-weight roller blade-like rear wheels that will only come into play when the 'cart' is tilted. A third 'flippable' wheel in the front tilts the case to bring the rear wheels into play and enables the case to function as a cart tricycle (see diagram). This design minimises bulk and weight on the case itself and  
20 makes the case practical and convenient to use.

Fifthly, the push-trolley suitcase design is more ergonomically suited for moving large and heavy loads. Furthermore, it is easier to push than to pull a heavy load. This push-trolley suitcase design enables one to cart a heavy suitcase load with  
25 more control and with much less effort. Furthermore, this trolley suitcase design can also be adapted for pulling purposes such as reversing from a right corner and reversing down from a step.

Sixthly, the push trolley suitcase design can be used as a push trolley in itself.  
30 Other luggage can be piled on top of it and carted around as with the use of an airport or train station push trolley. This is possible with contemporary plastic that is tough, light-weight and strong. Other options include the use of canvass with aluminium skeletal frame reinforcement.

Seventhly, in addition to the push trolley function, the push trolley suitcase can conveniently be converted into a push pram for babies or toddlers with suitable accessorial and safety attachment.

- 5 Furthermore, the base of suitcase is at an incline when the retractable wheel is in use. This helps to bring the hind-wheels into play, and shifts the centre of gravity backwards towards the hind-wheels to improve stability on the tricycle and manoeuvrability of the front multidirectional wheel. It also tilts the handle bar backwards to allow for foot clearance when walking and pushing the case and  
10 keeps the stacked luggage on the trolley in place.

The L-shape wheel frame design confers stability to all directions of wheel movement, takes up minimal luggage space when retracted and resists compressive forces when in use and requires less material bulk.

15

- It will be appreciated that a retractable steering wheel assembly as illustrated in Figure 4 and as described above could be employed in a luggage case where the steering wheel assembly and support wheels were of substantially equivalent size. In this case the luggage case would be substantially parallel to the surface on which  
20 it was being wheeled.

In summary, the present invention provides a wheeled luggage case having a luggage receptacle, the receptacle having a bottom wall, a top wall, opposed end walls and opposed side walls forming a luggage compartment, wherein said luggage  
25 case further comprising:-

- (i) a plurality of support wheels located at one end of the bottom wall;
  - (ii) a retractable steering wheel assembly, located on the bottom wall, distanced from the support wheels, said steering wheel assembly being moveable between an active position in which the wheel assembly extends below the  
30 bottom wall of the luggage receptacle and an inactive position in which the wheel assembly is substantially wholly within the profile of the luggage receptacle;
  - (iii) a handle means located at the same end of the luggage receptacle as the support wheels;
- 35 wherein when the steering wheel assembly is in an active position it extends further from the base wall than the support wheels. This arrangement whereby the luggage

receptacle is tilted back towards the support wheels displaces the centre of gravity towards the user pushing the case and makes it easier to push and steer.

- 5 Preferably the wheeled luggage comprises two support wheels and one retractable steering wheel assembly in a tricycle wheel configuration. This tricycle configuration confers additional manoeuvrability.

Preferably the retractable wheel assembly is pivotally mounted.

- 10 Preferably the luggage receptacle incorporates exterior recesses in both the end wall and the bottom wall adapted to accommodate the steering wheel assembly in the inactive and active positions respectively.

- 15 Preferably the wheel of the steering wheel assembly is pivotally mounted in the assembly such that it can rotate about its own axis and about an axis substantially perpendicular to it. This arrangement facilitates steering.

Preferably the steering wheel assembly, when in an active position, is supported by a support surface on the base wall of the case.

20

Preferably the support surface is recessed into the base wall of the case.

- 25 In a particularly preferred embodiment the support surface for the wheel assembly in the base wall is located at an acute angle to the base wall of the case with respect to a line between the front of the case and the support wheels. This arrangement has the advantage that the forces acting on the steering wheel assembly are transmitted mainly through the base of the case rather than through the pivot means about which the steering wheel assembly is mounted.

- 30 In a further preferred embodiment the steering wheel assembly and support wheels are so sized and shaped such that, with the steering wheel assembly in its active position, the base wall forms an acute angle with respect to the surface the case is standing on, the acute angle extending away from the support wheels. This arrangement displaces the centre of gravity of the case contents toward the support  
35 wheels and towards the handle and the user. This makes the case easier to push and more manoeuvrable.

Preferably the handle means can be moved between an active position at which the handle extends outwards from the luggage receptacle and can be engaged by the user at an inactive position at which the handle is contained substantially within the

5 luggage receptacle.

**Claims:**

1. A wheeled luggage case having a luggage receptacle, the receptacle having walls forming a luggage compartment, wherein said luggage case further comprising:-
  - (i) a plurality of support wheels located at one end of the bottom wall;
  - (ii) a retractable steering wheel assembly, located on the bottom wall, distanced from the support wheels, said steering wheel assembly being moveable between an active position at which the wheel assembly extend below the bottom wall of the luggage receptacle or an inactive position at which the wheel assembly is substantially within the profile of the luggage receptacle;
  - (iii) a handle means located at one end of the luggage receptacle for steering, pushing, pulling and lifting purposes;
2. A wheeled luggage case according to Claim 1 comprising two support wheels and one retractable steering wheel assembly in a tricycle wheel configuration.
3. A wheeled luggage case as claimed in any preceding claim wherein when the steering wheels are retracted, the support wheels are inactivated by a stopper.
4. A wheeled luggage case as claimed in any preceding claim wherein the retractable wheel assembly is pivotally mounted.
5. A wheeled luggage case as claimed in any preceding claim wherein the luggage receptacle incorporates exterior recesses in both the end wall and the bottom wall adapted to accommodate the steering wheel assembly in the inactive and active positions respectively.
6. A wheeled luggage case as claimed in any preceding claim wherein the wheel of the steering wheel assembly is pivotally mounted in the assembly such that it can rotate about its own axis and about an axis substantially perpendicular to it.
7. A wheeled luggage case as claimed in any preceding claim wherein the steering wheel assembly is supported by a support surface on the base wall of the case.

8. A wheeled luggage case as claimed in Claim 7 wherein the support surface is recessed into the base wall of the case.

5 9. A wheeled luggage case as claimed in Claim 8 wherein the support surface for the wheel assembly in the base wall is located at an acute angle to the base wall of the case with respect to a line between the front of the case and the support wheels.

10 10. A wheeled luggage case as claimed in any preceding claim wherein the handle means can be moved between an active position at which the handle extends outwards from the luggage receptacle and can be engaged by the user and an inactive position at which the handle is contained substantially within the luggage receptacle.

15

11. A wheeled luggage case as claimed in any preceding claim wherein the case in the active wheeling arrangement can act as a trolley cart to carry other luggage

12. A wheeled luggage case as claimed in any preceding claim wherein when  
20 the wheeling system is in an inactive arrangement, the base of the case is level to the ground by a 'stopper' at one end and the support wheels at the other. The other purpose of this arrangement is to maintain station of the case.

13. A wheeled luggage case as claimed in any preceding claim wherein a brake  
25 system is incorporated for safety and convenience purposes.

14. A wheeled luggage case as claimed in any preceding claim wherein the steering wheel assembly and support wheels are so sized and shaped such that, with the steering wheel assembly in its active position, the base wall forms an acute  
30 angle with respect to the surface the case is standing on, the acute angle extending away from the support wheels.

15. A wheeled luggage case as claimed in any preceding claim wherein the posterior surface of the case is recessed to provide additional striding space.

35



AbstractIMPROVED LUGGAGE

- 5 The present invention provides a wheeled luggage case having a luggage receptacle, the receptacle having a bottom wall, a top wall, opposed end walls and opposed side walls forming a luggage compartment, wherein said luggage case further comprises:-
- (i) a plurality of support wheels located at one end of the bottom wall;
  - 10 (ii) a retractable steering wheel assembly or assemblies, located on the bottom wall, distanced from the support wheels, said steering wheel assembly being moveable between an active position in which the wheel assembly extends below the bottom wall of the luggage receptacle and an inactive position in which the wheel assembly is substantially within the profile of the luggage
  - 15 receptacle;
  - (iii) a handle means located at the same end of the luggage receptacle as the support wheels;
- wherein when the steering wheel assembly is in an active position it extends from the base wall.

1/20

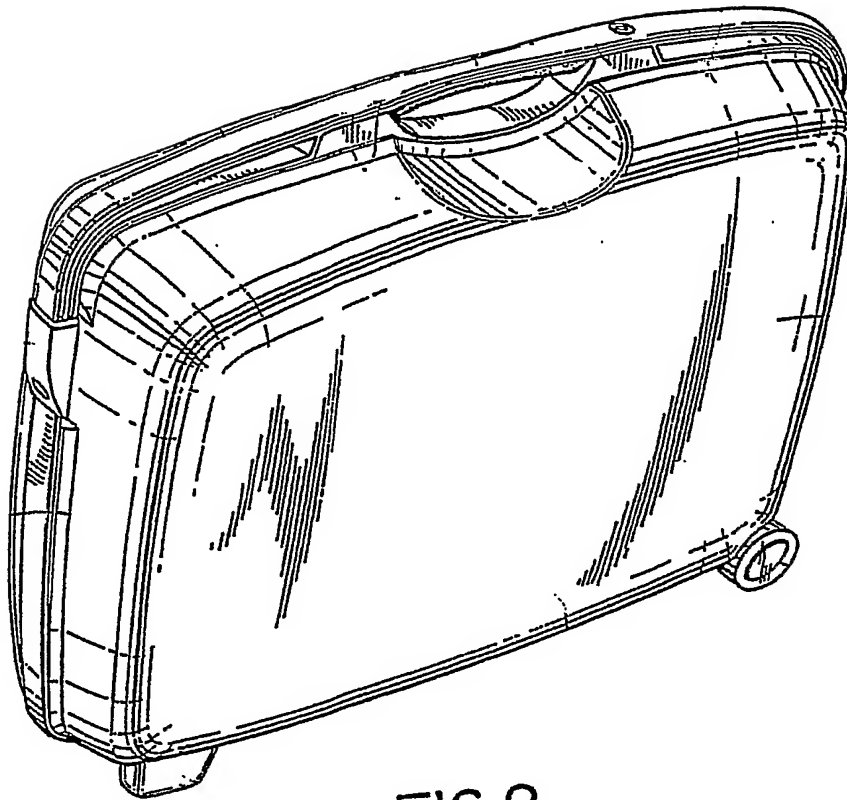


FIG. 2

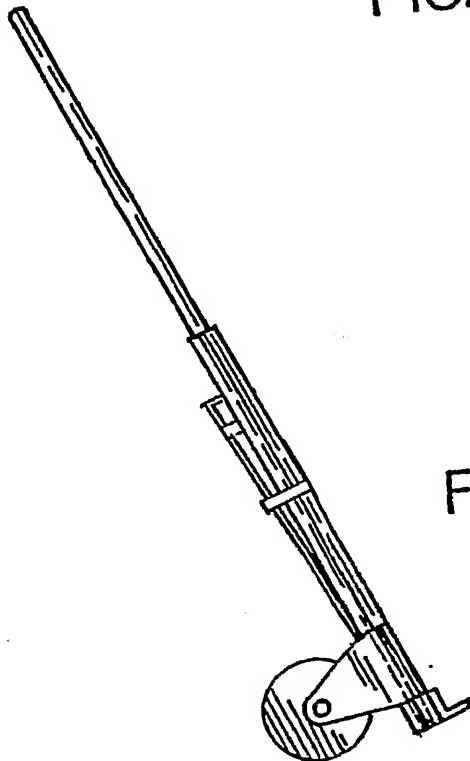


FIG. 1



2/20

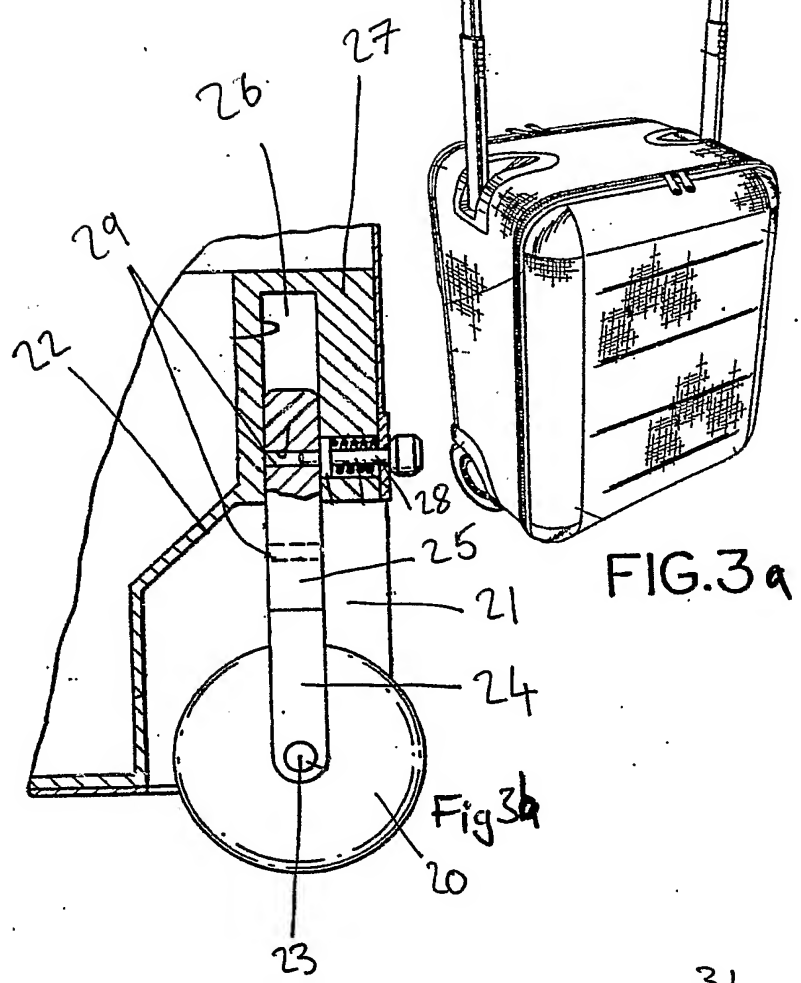


FIG. 3a


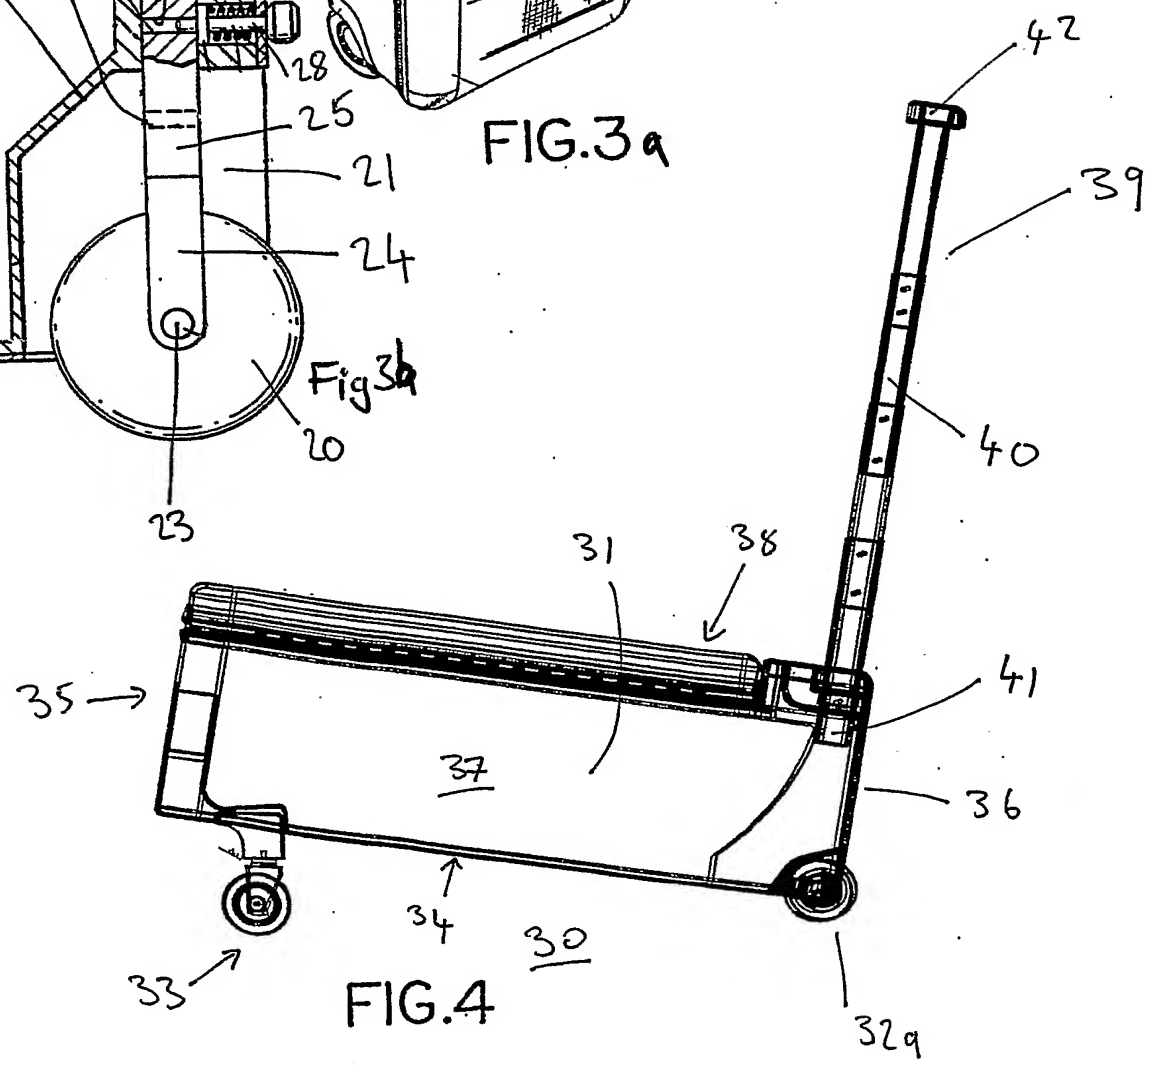


FIG. 4





3/20



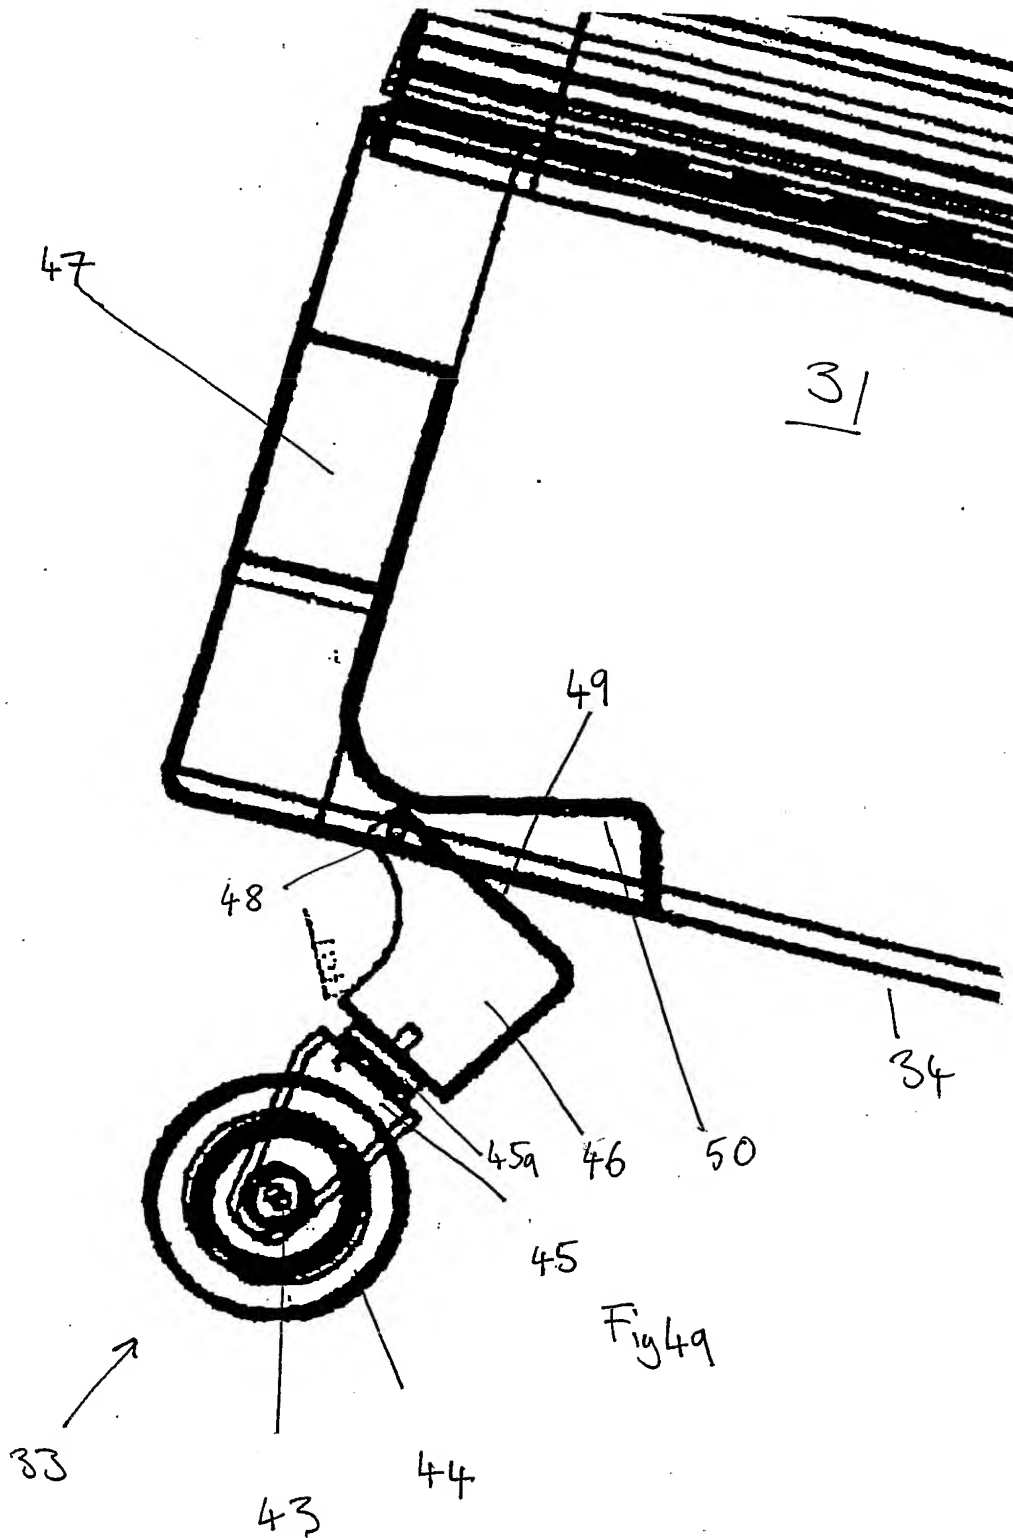

4/20

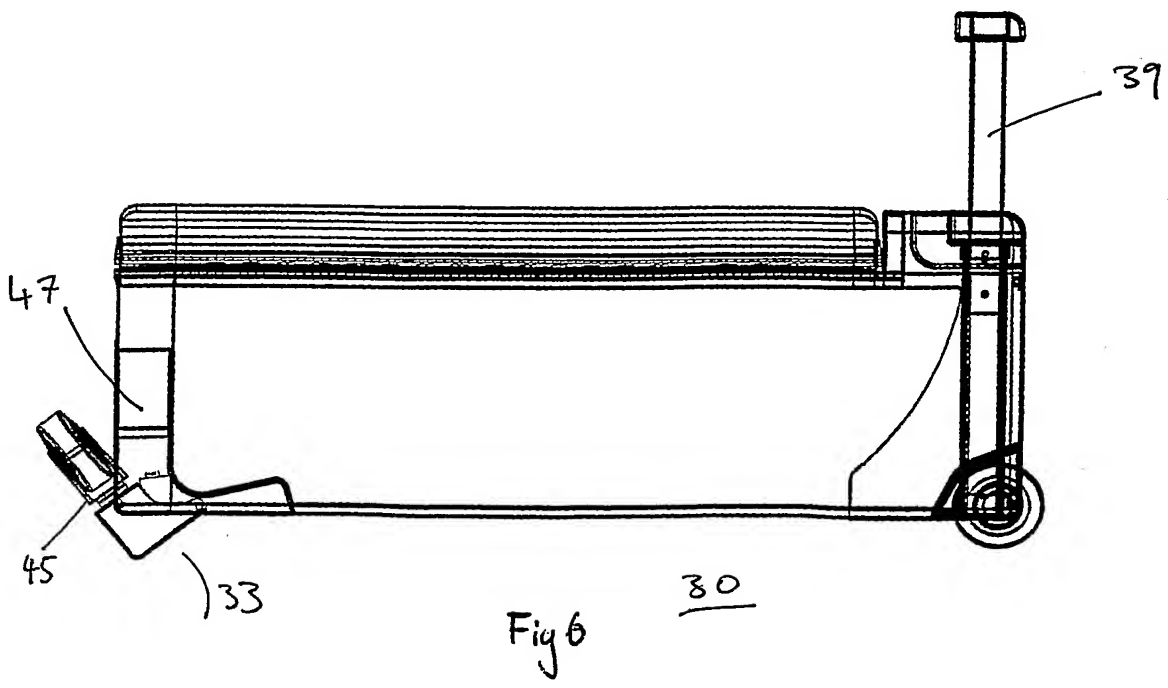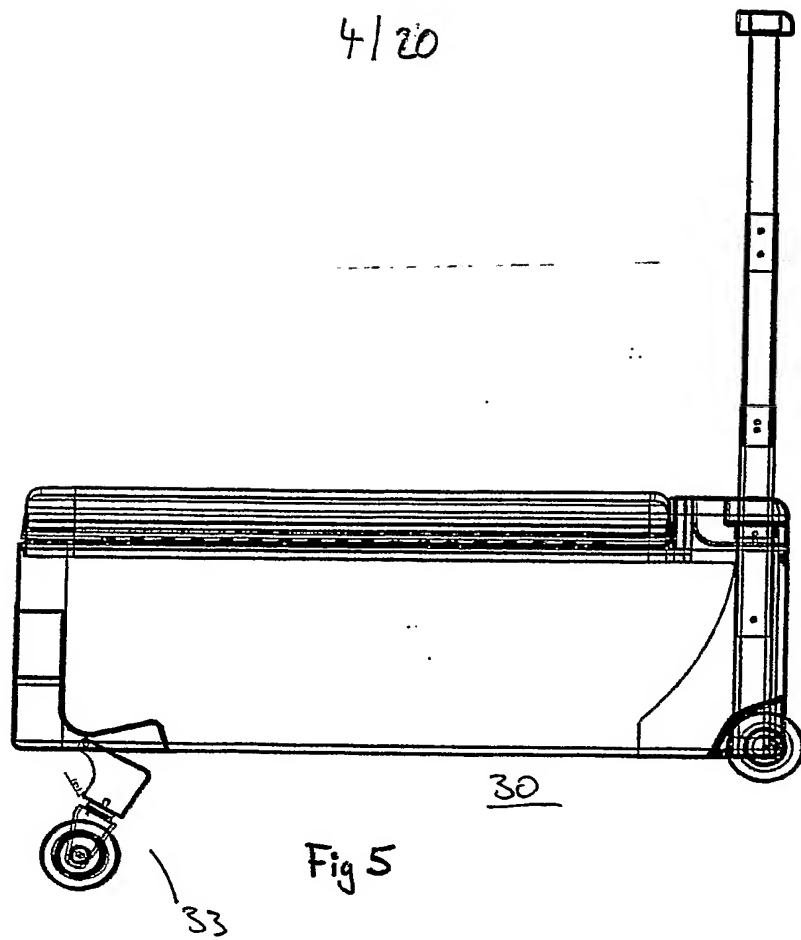





5/20

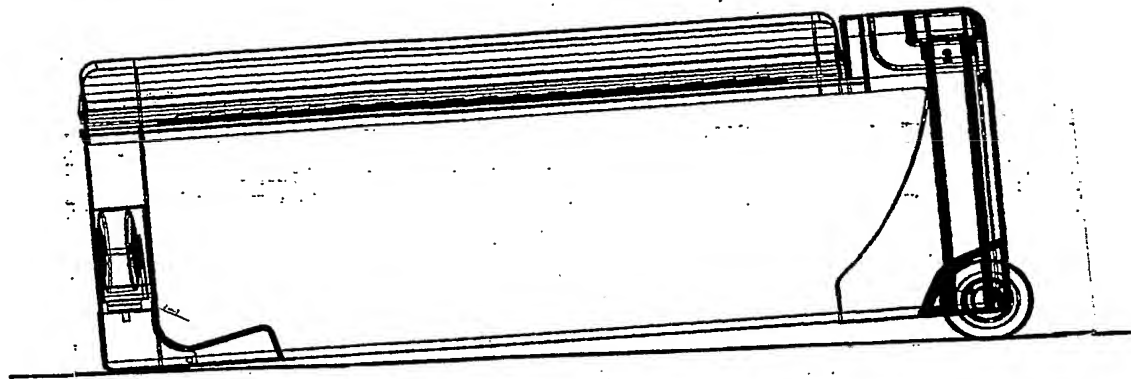


Fig 7

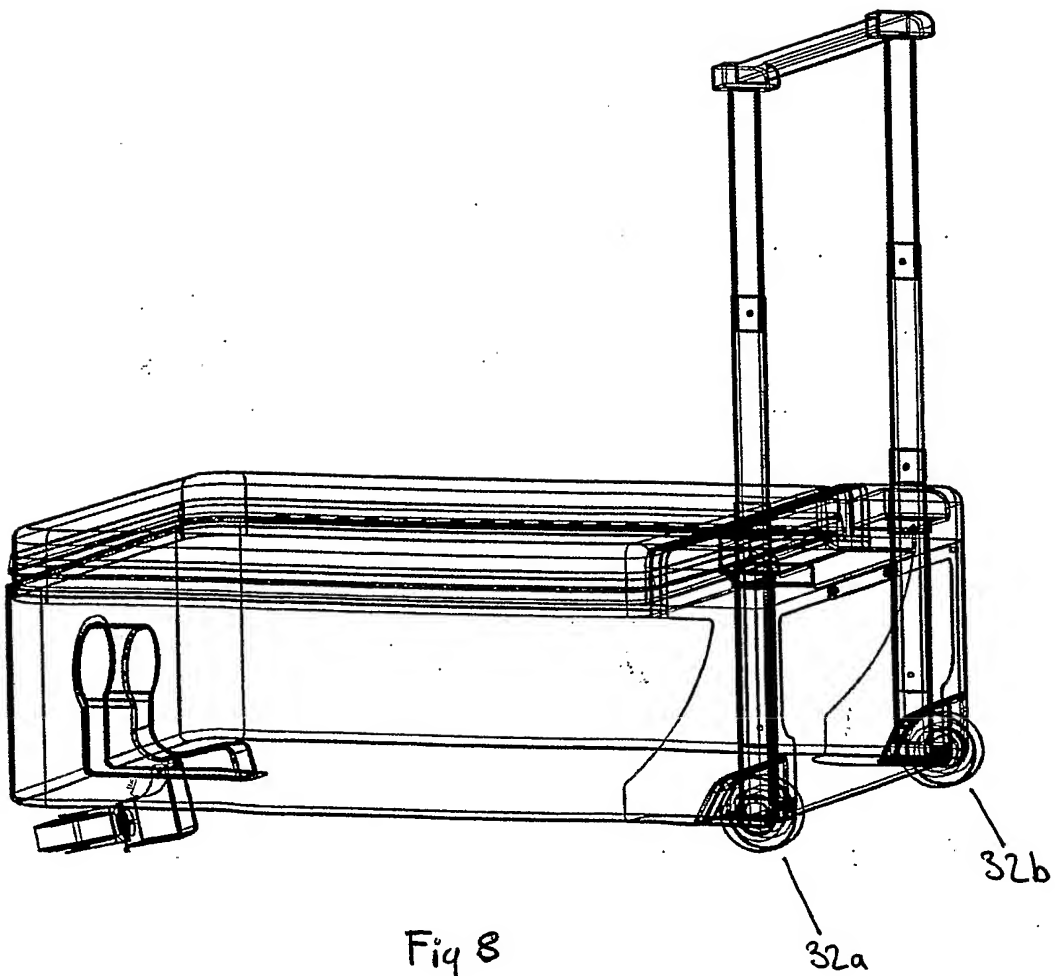


Fig 8



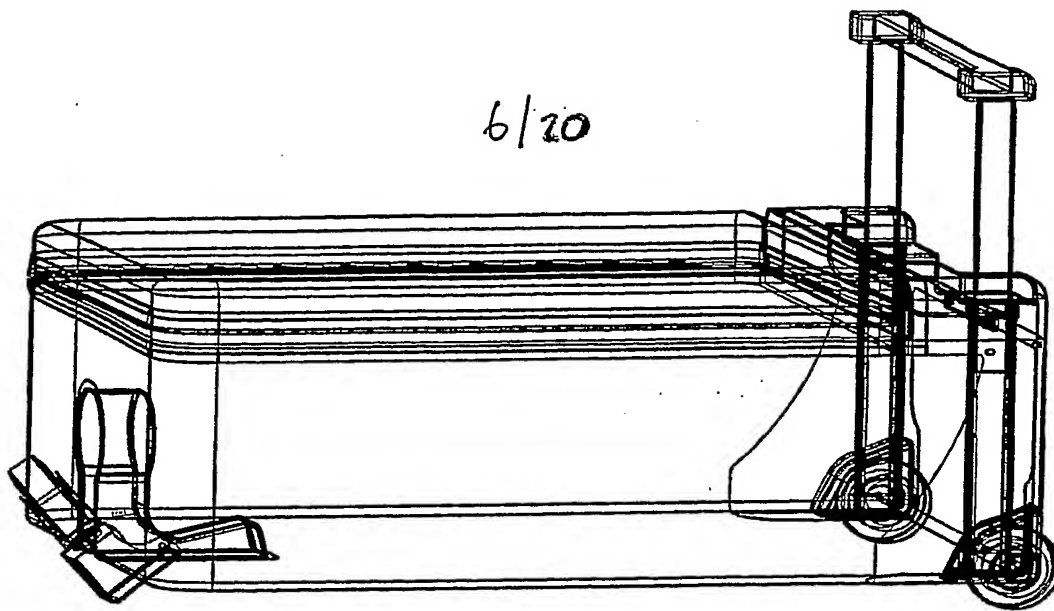


Fig 9


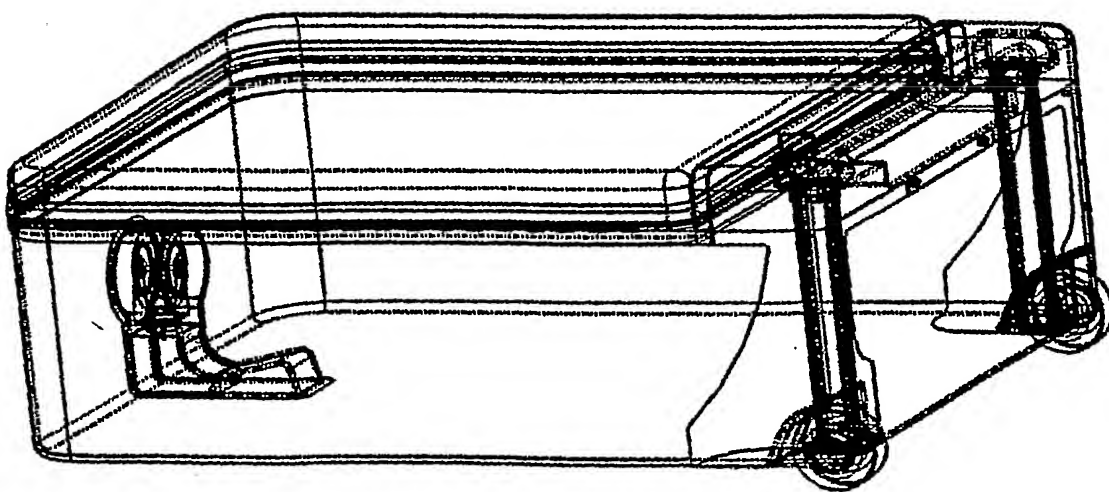


Fig 10



7/20

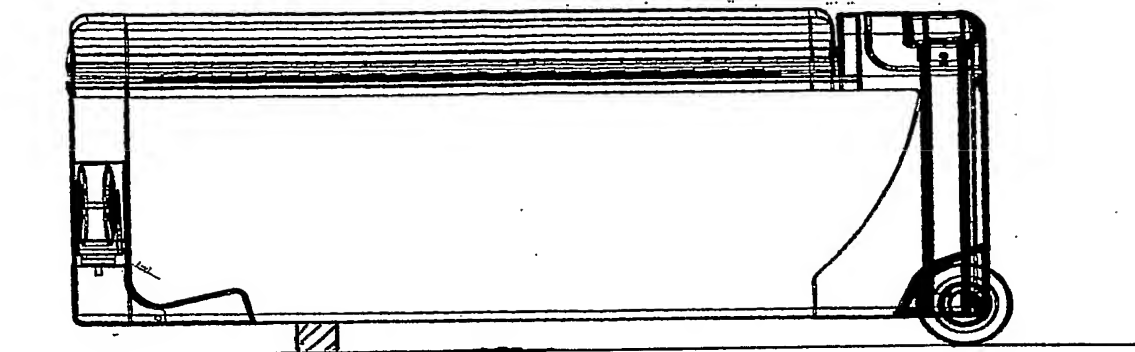


49

Fig 11



8/20

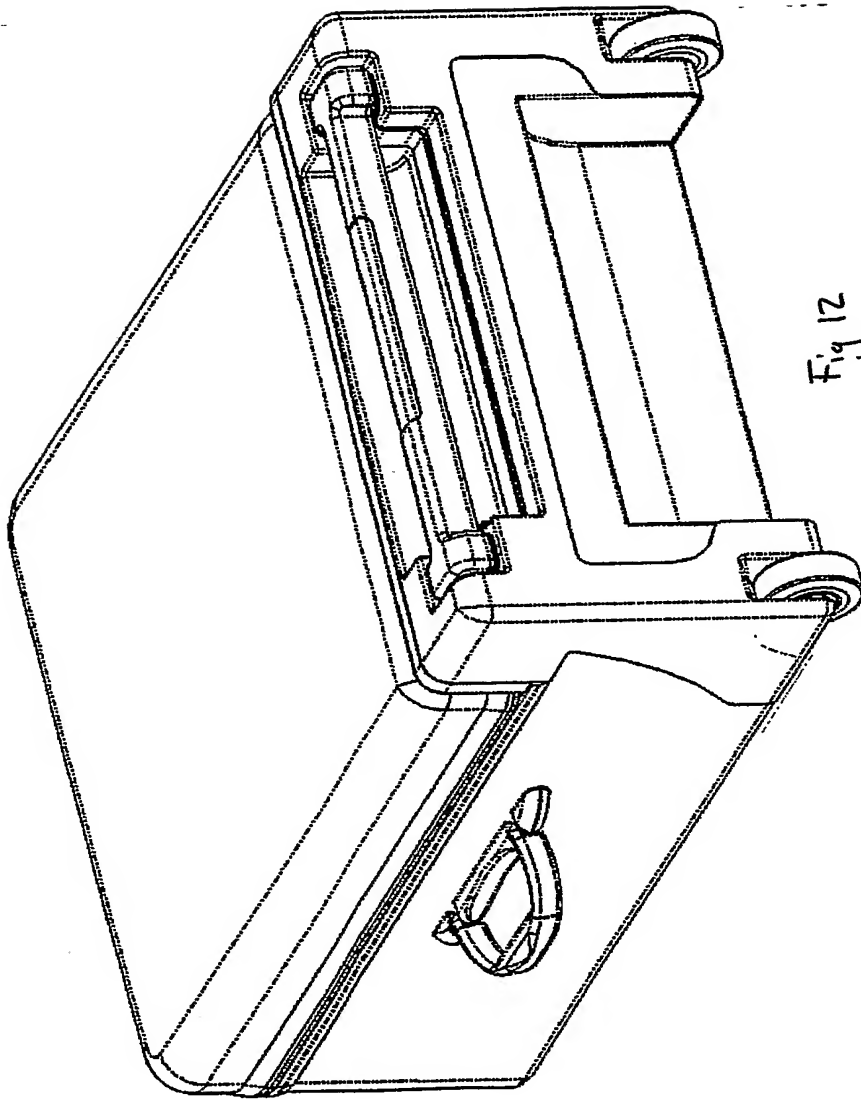





9/20


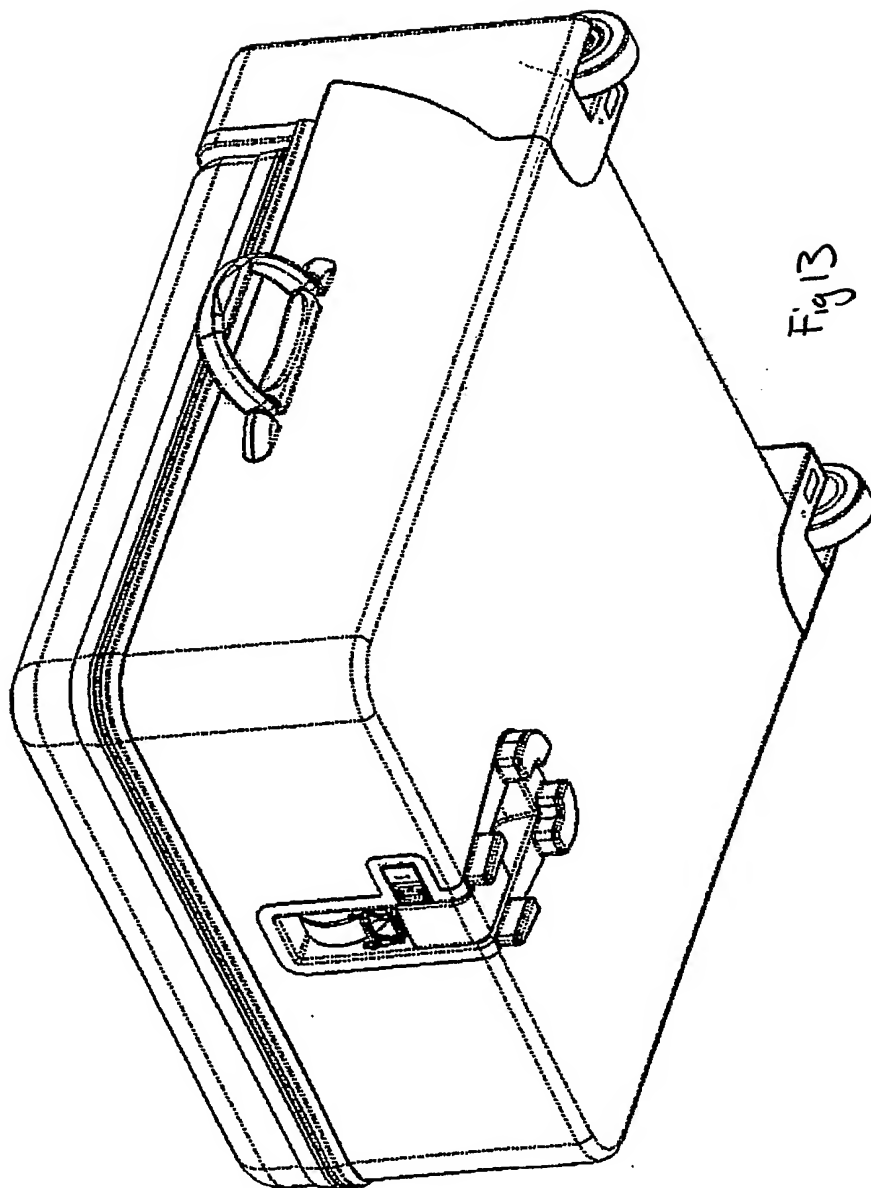


Fig 13



10/20

Fig 14

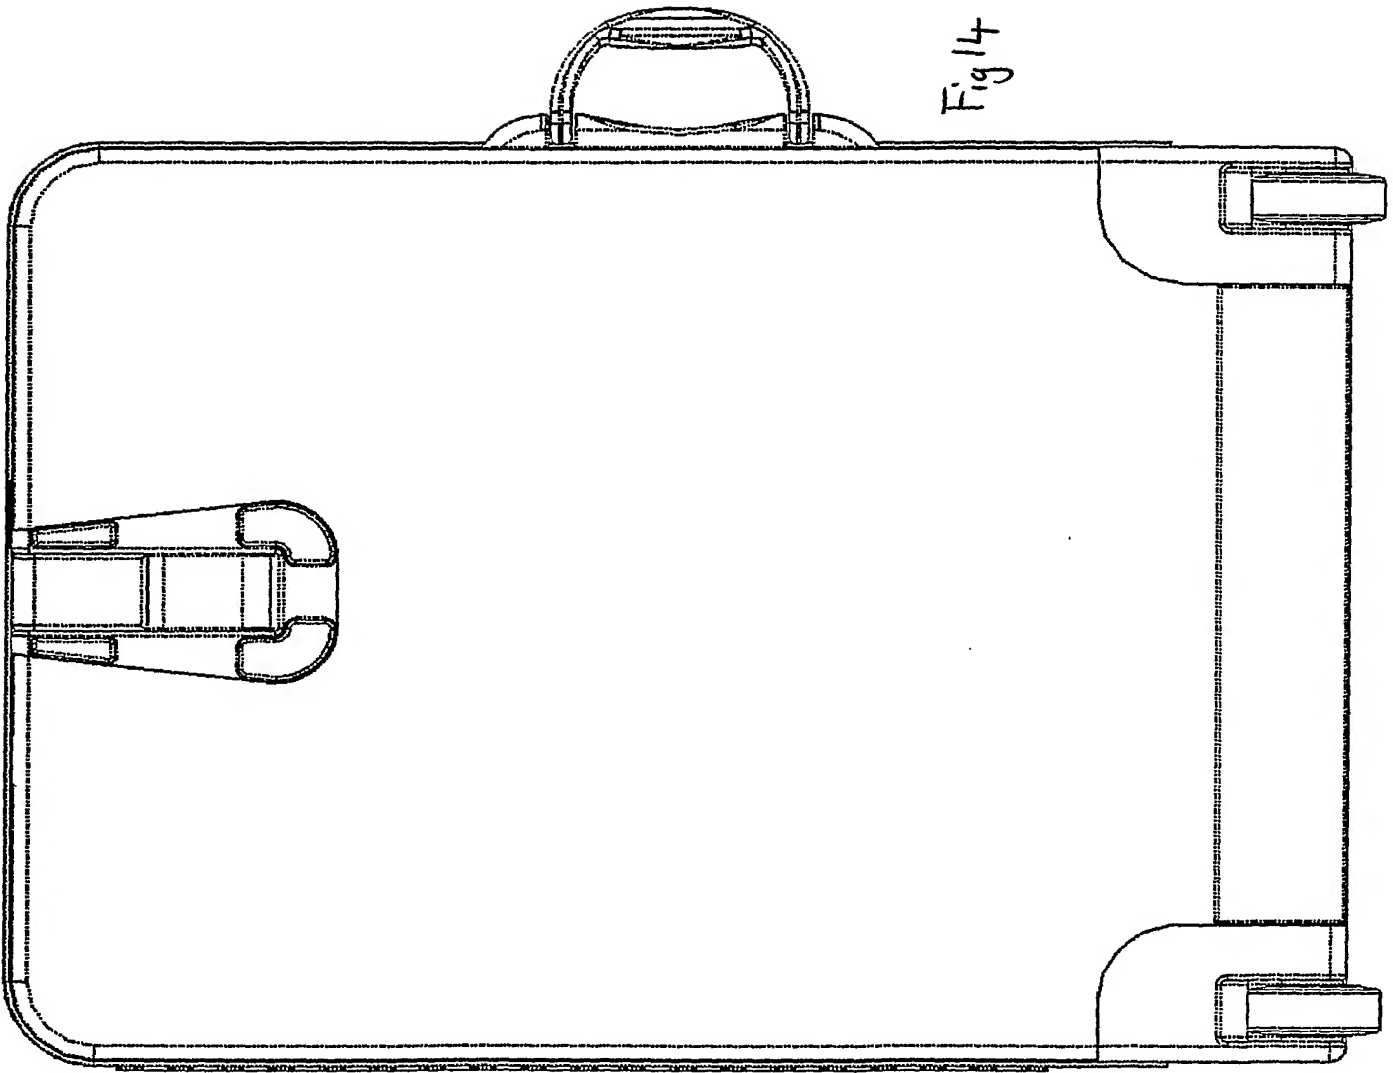



11/20

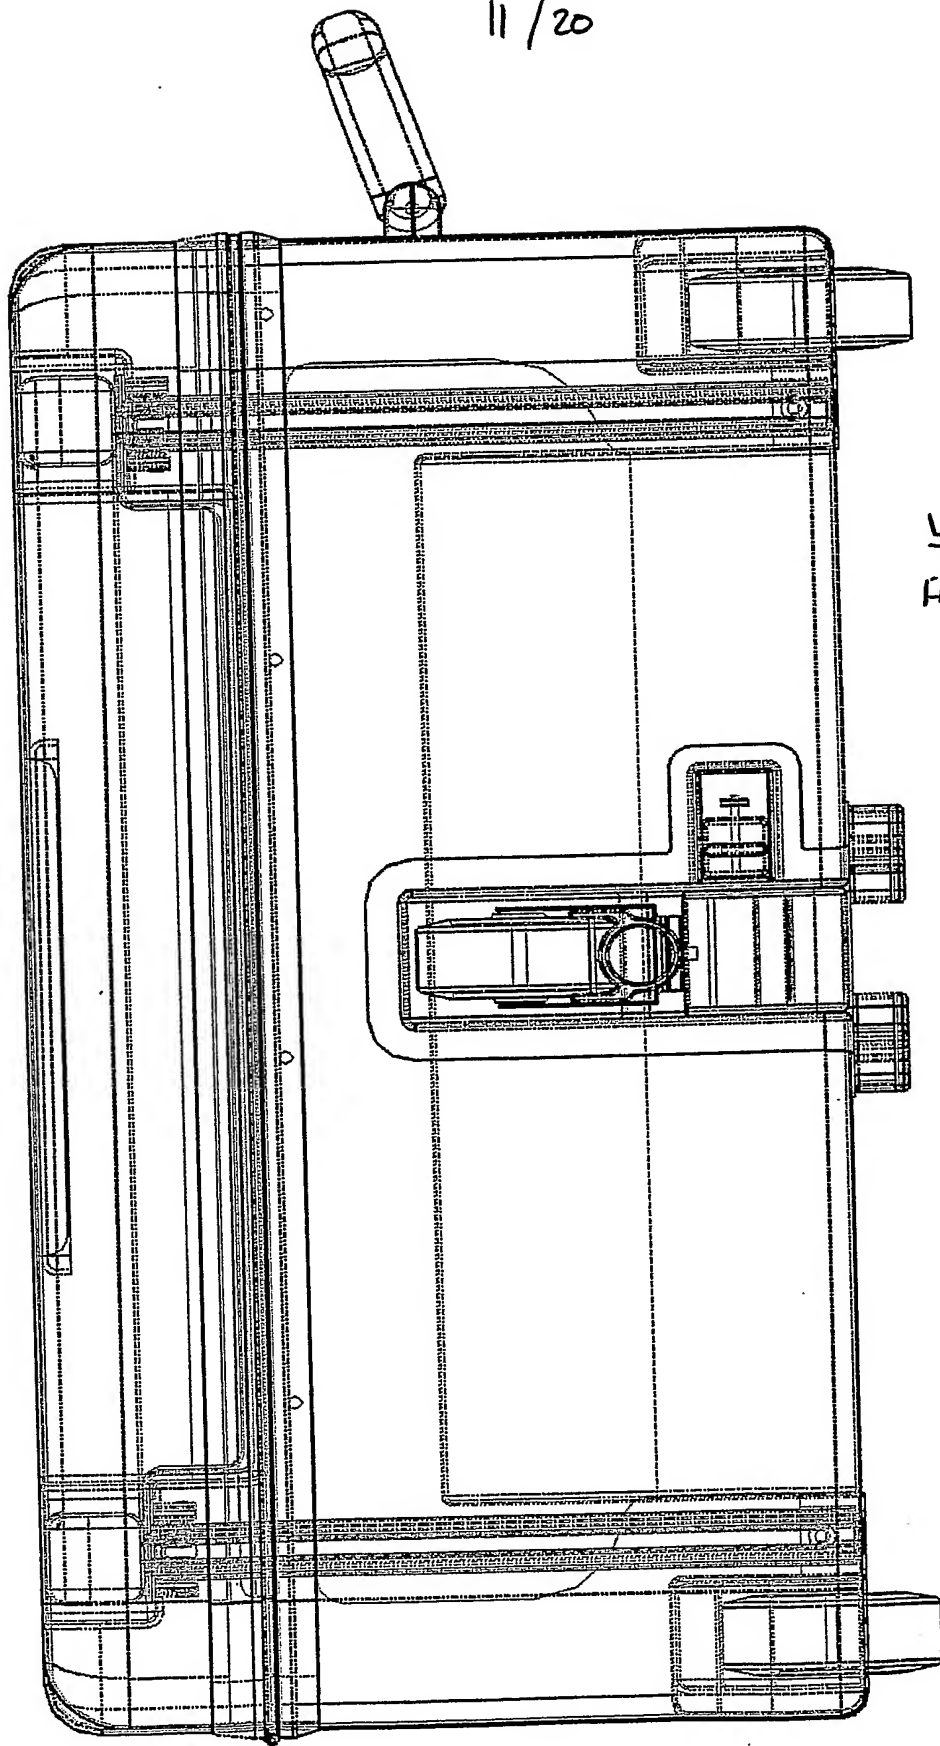


Fig 15



12/20

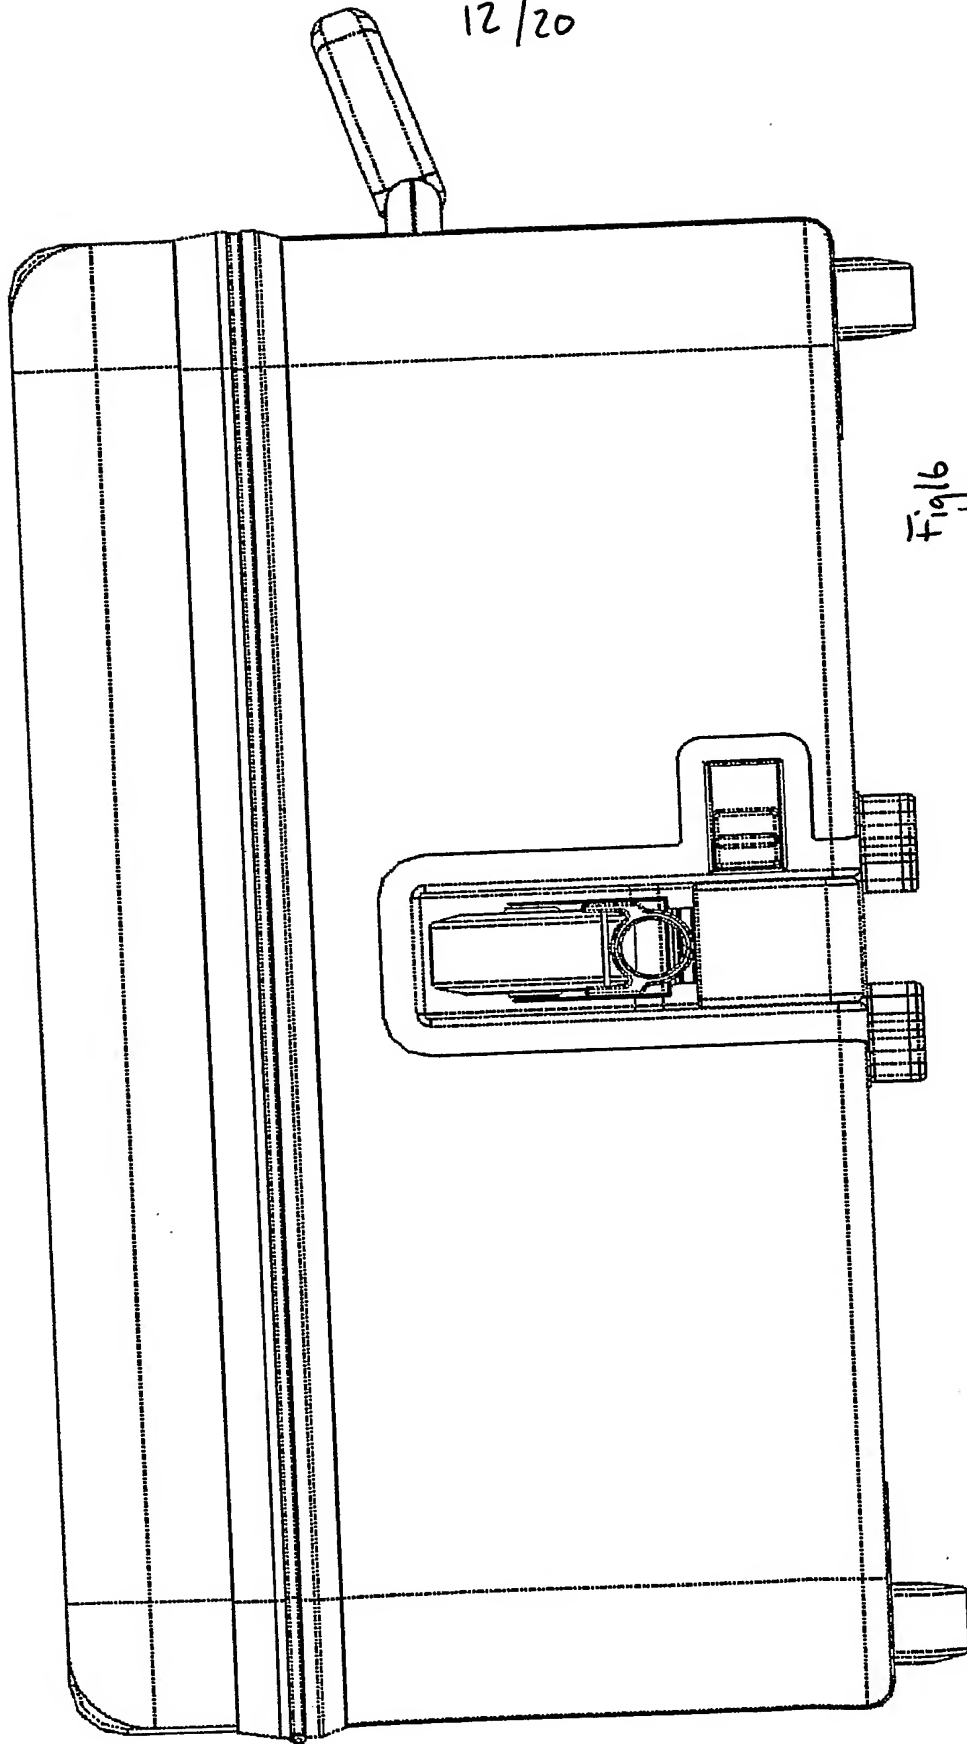


Fig 6





13/20

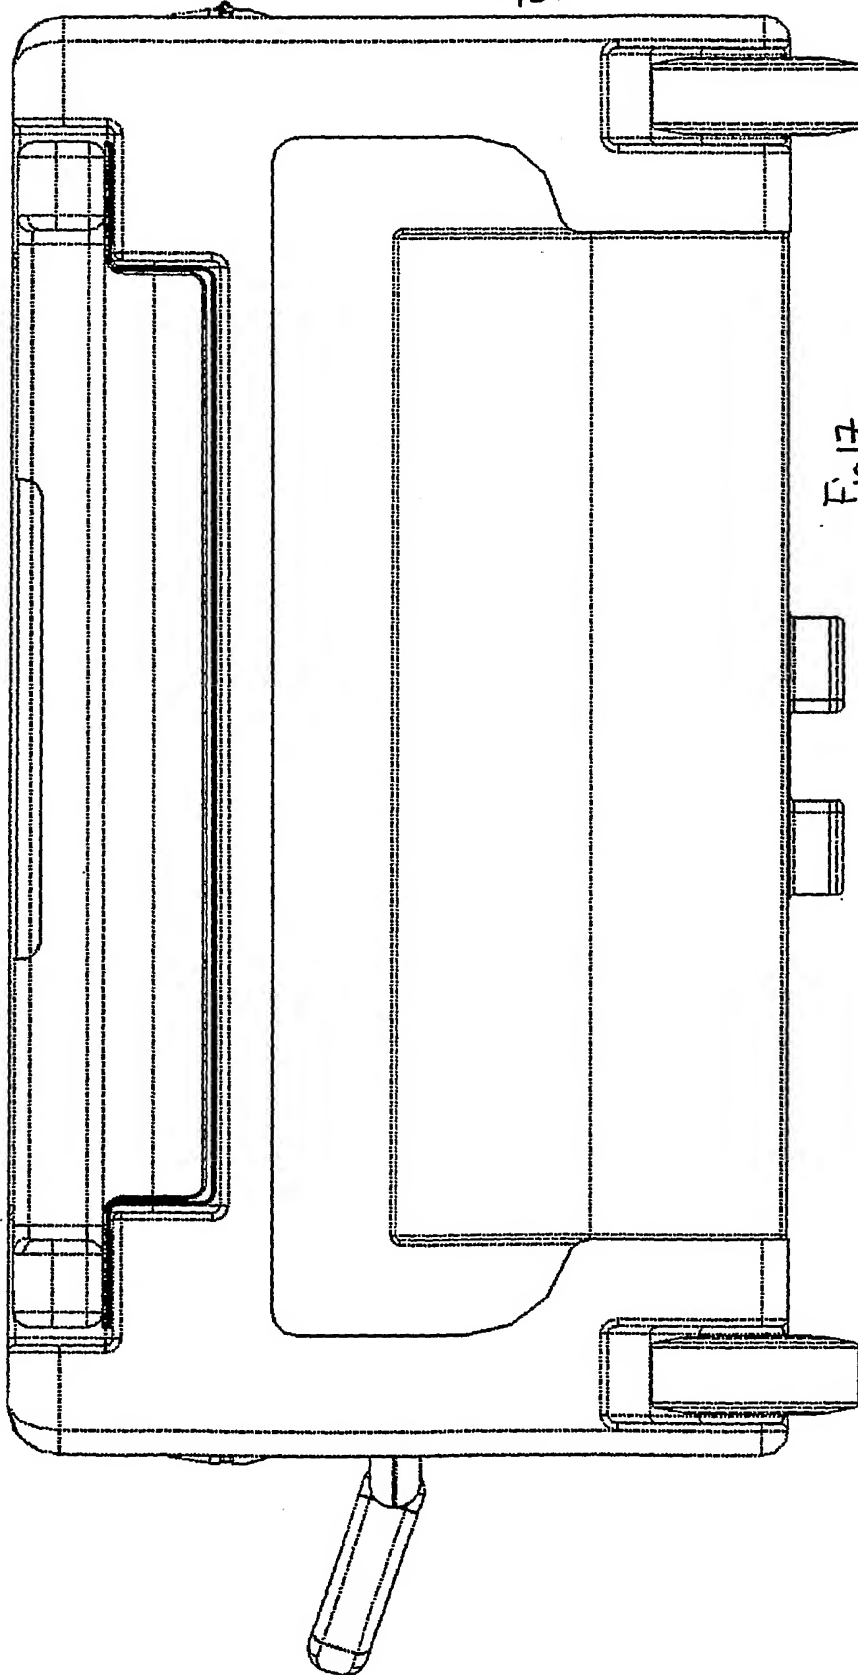


Fig 17



14/20

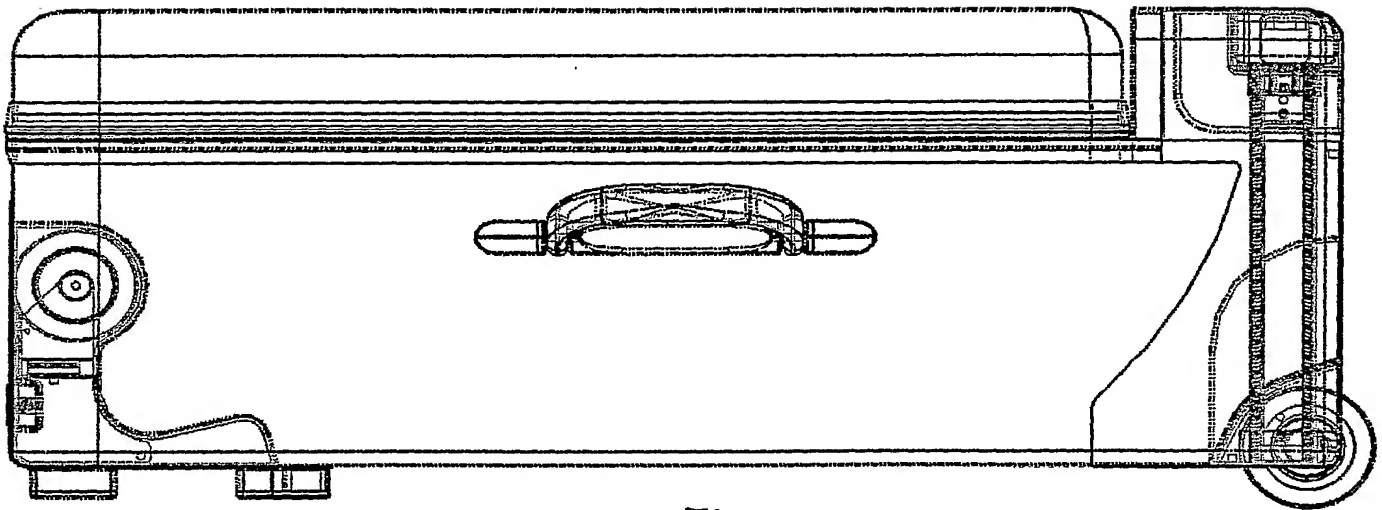


Fig 18



15/20

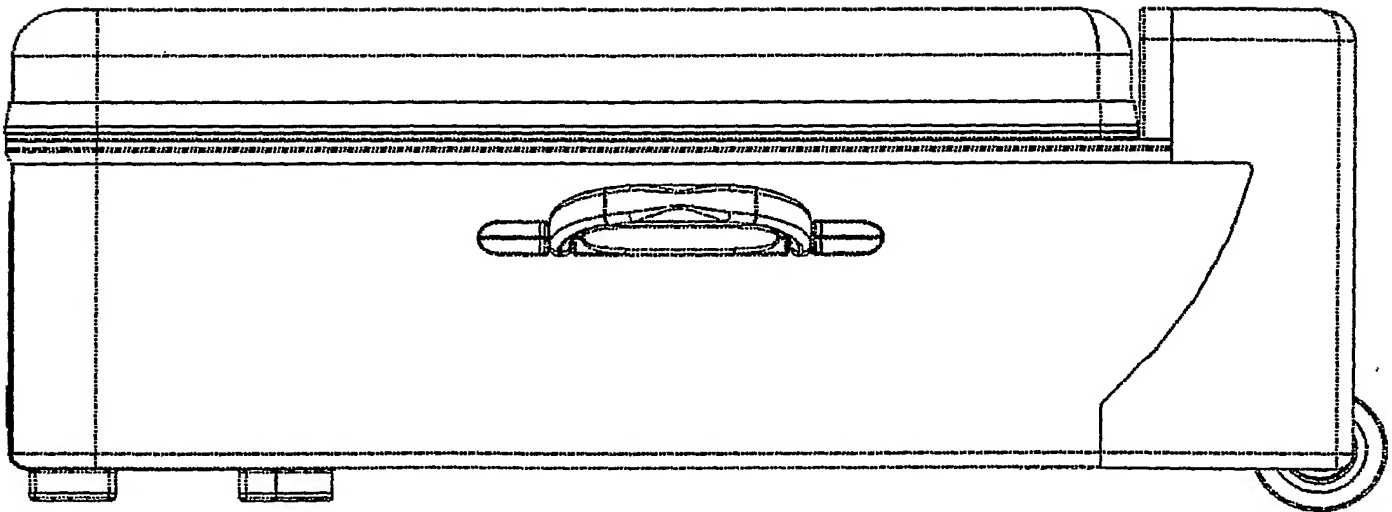


Fig 19



16/20

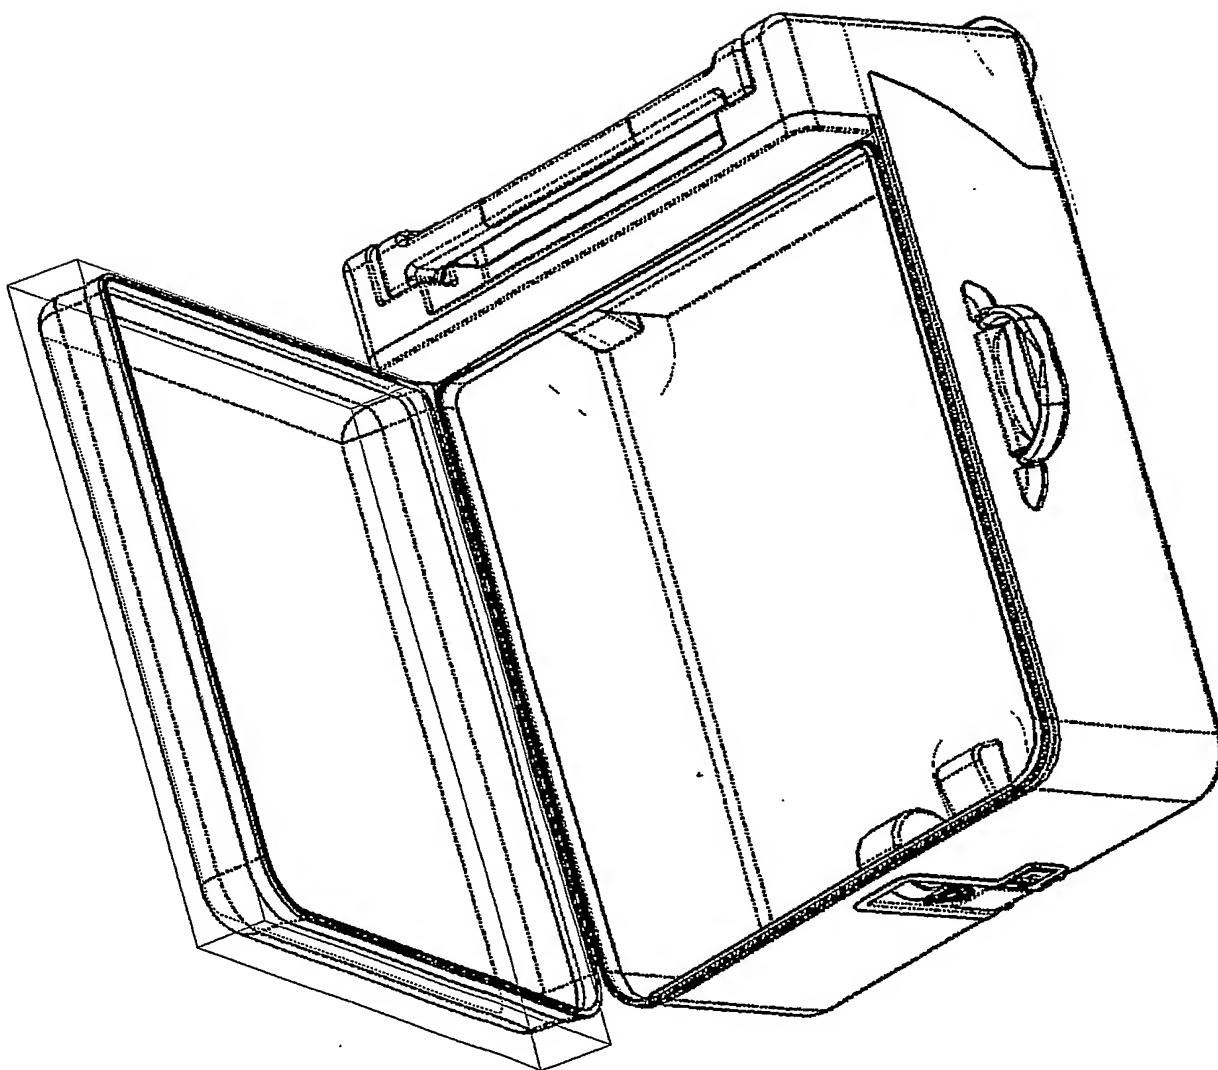


Fig 20





17/20

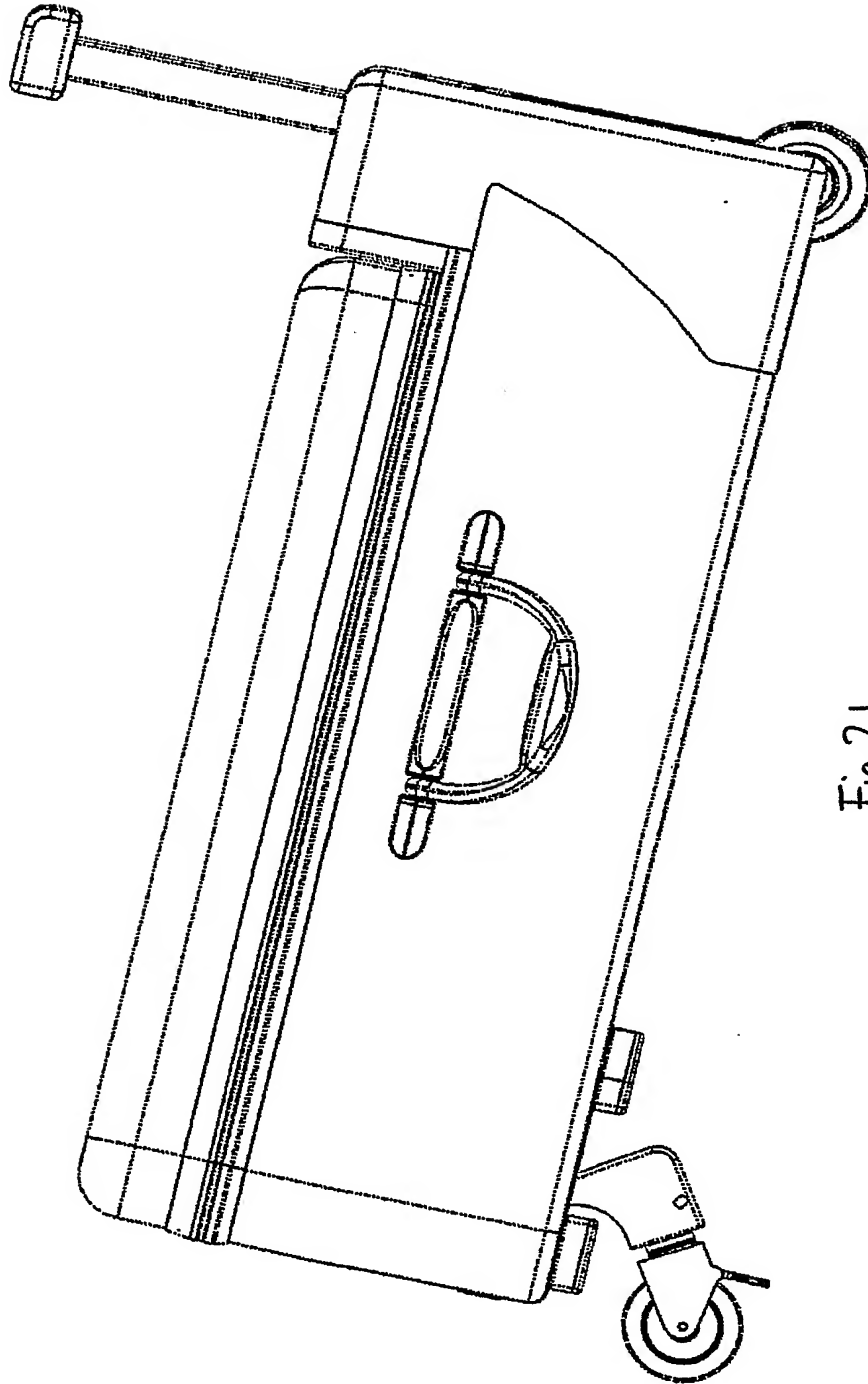


Fig 21



18/20


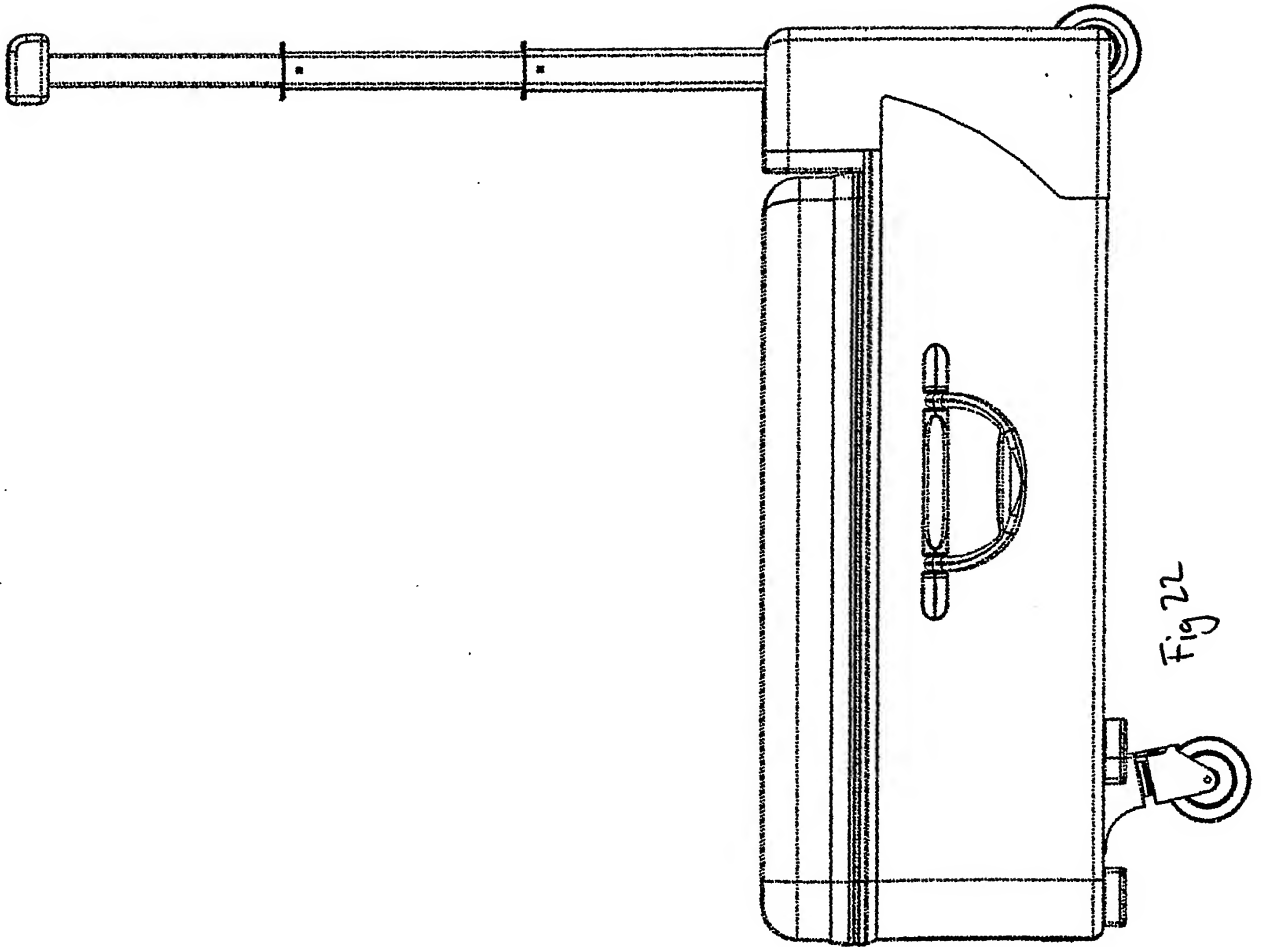


Fig 22



19/20



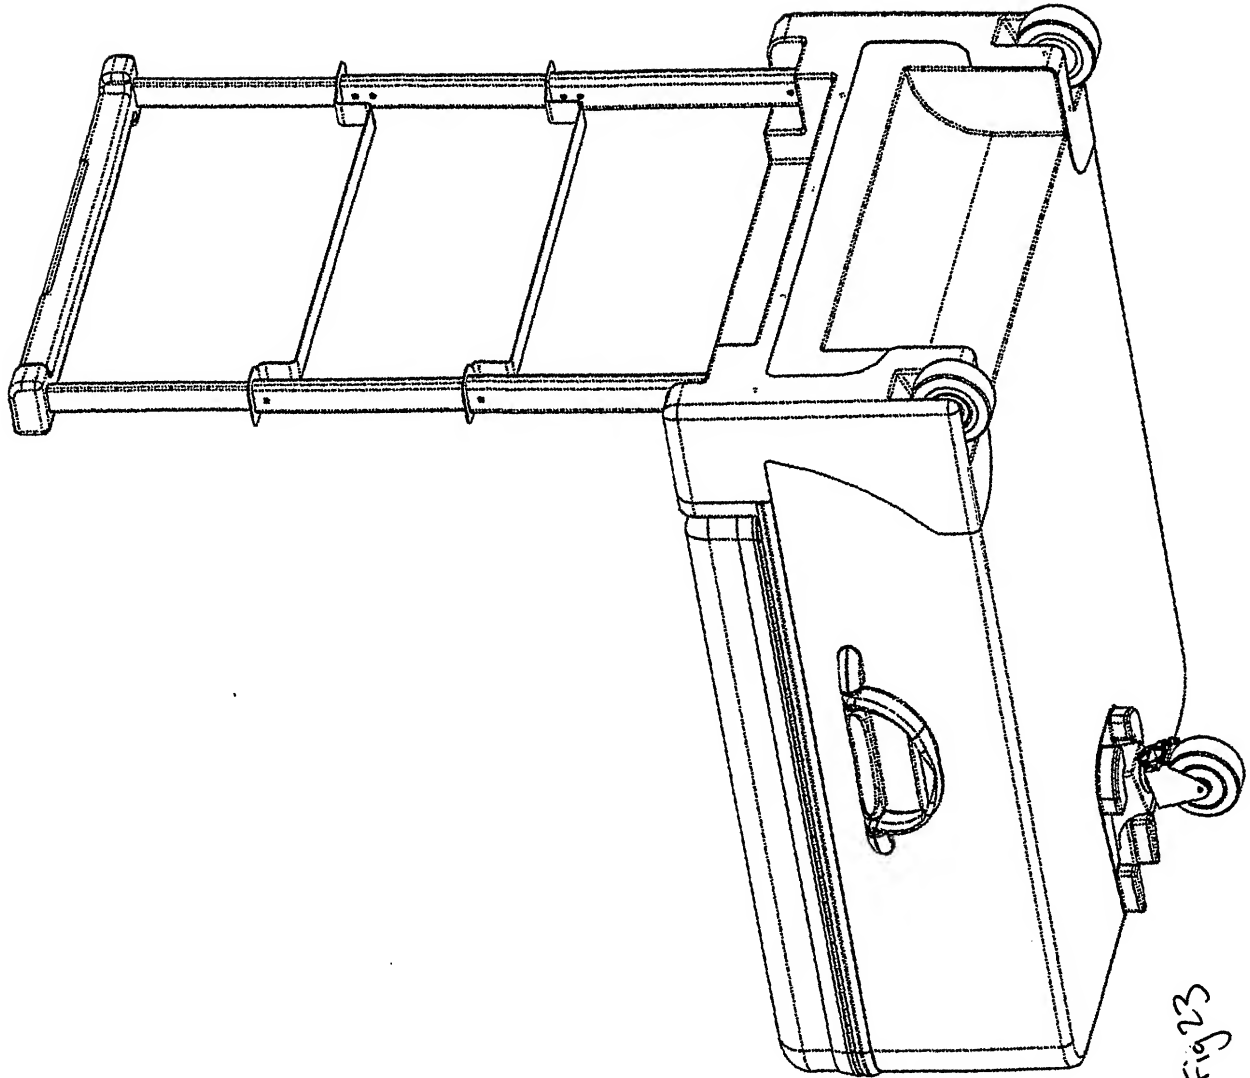

20/20

